

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



0744527

PATENT NO EP (UK).....

THE BRITISH LIBRARY

25 JUL 2001

SCIENCE TECHNOLOGY AND
BUSINESS

TRANSLATION OF EUROPEAN PATENT (UK)
UNDER SECTION 77 (6) (a)



54/77

**Filing a translation in connection with
a European patent or a European
patent application**

(see the notes on the back of this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

ADW/11467

2. European patent number or publication
number of application (or International
publication number (see note (e)))

0 744 527

3. Full name and address of the or of each
applicant for or proprietor of the
European patent (UK)

Baker Hughes Incorporated,
3900 Essex Lane, Suite 1200,
P.O. Box 4740, Houston,
Texas 77210-4740,
U.S.A.

Patents ADP number (if you know it)

4. What kind of translated document listed at
note (c) are you sending with this form?

1(i)

(Answer by writing 1(i), 1(ii), 1(iii) or 2)

5. Date when the European patent (UK) was
granted or amended
(See note (f))

11th July 2001

6. Full name, address and postcode in the United
Kingdom to which all correspondence relating
to this form and translation should be sent

GRAHAM WATT & CO.
RIVERHEAD
SEVENOAKS
KENT
TN13 2BN

Patents ADP number (if you know it)

1685001

7. Do you want the address in part 6 above to
be the address for service recorded on the
Register or to replace the address for service
currently on the Register?
(If so then write 'YES')

Yes

8.

Signature

Date

GRAHAM WATT & CO.

2nd July 2001

9. Name and daytime telephone number of
person to contact in the United Kingdom

A.D. WADESON - 01732 450055

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) This form must be used when filing:

- 1) a translation into English of:
 - i) the patent specification of a European patent (UK) as it has been or will be granted (Section 77(6)(a) applies);
 - ii) the amendment of a specification of a European patent (UK) (Section 77(6)(b) applies); or
 - iii) the claims of an application for a European patent (UK) (Section 78(7) applies); or
- 2) the correction of a translation of a specification of a European patent (UK), or of an application for a European patent (UK) (Section 80(3) applies).

You must file two copies of this form and two copies of the translation. If you want to file different translations you must use a separate form for each different translation.

Translations under (1)(i) and (1)(ii) above must include the drawings, if any, regardless of whether the drawings contain any translated text.

- d) The translation must be verified as corresponding to the original text and it should bear the patent or publication number. An acceptable form of verification is "I (name and address of the translator) hereby declare that I am the translator of the documents attached and certify that the following is a true translation to the best of my knowledge and belief".
- e) The international publication number should be given only when paragraph 3(1)(b) of Schedule 4 to the Patents Rules 1995 applies in the case of an application published under the Patent Co-operation Treaty.
- f) You should state in part 5 the date on which the grant or amendment of the European patent (UK) was mentioned in the European Patent Bulletin or if it has not yet been mentioned, the date on which it will be. If you have approved the text in which the European Patent Office intends to grant a European patent (UK), but you have not yet been told of the 'grant date', you can still file a verified translation of the specification but in this case you should leave part 5 blank.
- g) Once you have filled in the form you must remember to sign and date it.
- h) For details of the fee payable with this form, please contact The Patent Office. If you are paying from abroad, payment can be made, for example, by:
 - 1) Eurocheque payable in sterling (this is the easiest method and is a service available from your local bank).
 - 2) Foreign cheques in sterling (drawn on a UK branch of the bank).
 - 3) International Money Order or Postal Order in Sterling.

1505.

PATENTS ACT, 1977

(a)

IN THE MATTER OF
European Patent No. 95 107 863.3
Application No. 0 744 527
in the name of
BAKER HUGHES INC.

ions

zwings

catton
am the

itents

If you
ou
is case

I, DENNIS STANLEY TAVENER, Fellow of the Institute of
Linguists and Member of the Institute of Translation and Interpreting,
of 52 Garden Wood Road, East Grinstead, West Sussex RH19 1JU,
hereby certify that I am the translator of the attached document and
that it is a true translation to the best of my knowledge and belief of
the above-mentioned European Patent.

Signed this 26th day of June 2001

b).



.....
(Dennis S. Tavener, FIL., MITI)

The invention relates to a method of and an apparatus for transmitting data available at the surface to a data receiver disposed below ground in a bore hole, in accordance with the preamble to claims 1 to 7.

US-A-4 471 843 discloses such a method and such an apparatus and is deemed to be the nearest prior art.

In the case of a further known method of this type (US-A-5 332 048), the volumetric flow of circulating medium generated by the drilling and circulating pump is altered by sequential switching of the pump on and off. The sensor is thereby constructed as a flow switch which informs the data receiver of the on/off status of the flow of circulating medium, said data receiver then further processing the switching signals while taking into account their time-related sequence. Data transmitted and processed in this way can then trigger appropriate consequences, for example the presetting of an altered drilling direction for a directional drilling tool.

The successive switching of the drilling mud pump or pumps on and off again exposes them to considerable strain while they are in operation and the result is considerable wear and tear. At the same time however the drilling operation is adversely affected by the interruption in the drilling process while data is being transmitted, which can reduce drilling progress and the effective life of the drill head regardless of whatever special construction this may be. This applies particularly to data transmission procedures which take a considerable time on account of the quantity of data to be transmitted.

The invention is concerned with the problem of suffering minimal adverse effect on drilling operations due to the transmission of data to an underground data receiver carried out by simple means which operate substantially without wear and tear.

The invention resolves the problem by a method having the characterising features set out in claim 1 and by an apparatus having the characterising features set out in claim 7. With regard to further essential developments, reference is made to claims 2 to 4 and 8 to 16.

The method and apparatus according to the invention leave the drilling mud pump or pumps in an unchanged operating mode while data is being transmitted so that they constantly work under optimum conditions. The influencing of the constant volumetric flow generated by the drilling mud pump and independently of the pump operation makes it possible to alter volumetric flow in a pulsed fashion which is independent of the start-up and shut-down characteristics of the pump(s) and which only has to take transmission-technical parameters into account. Since during periods of data transmission circulating medium circulates in a constant and only fluctuating volumetric flow, adequate removal of drilling fines from the cutting area of the drill head and cooling of its cutting members can be guaranteed so that the drilling operation can be continued even over relatively long periods of time for data transmission with adverse effects. Since the frequency, the amplitude and flank pattern of the altering pulses of the volumetric flow of the circulating medium can be chosen substantially freely and linked to one another, reliable transmission of data can be guaranteed even if, while data is being transmitted to an underground data receiver in accordance with the invention, data is being simultaneously transmitted from an underground data store to an above-ground data receiver.

The structure means required are confined to a simple controlled branch pipe which can be operated with virtually no wear and tear, and to a volumetric flow meter which can likewise be produced at minimal structural cost. Constructing the volumetric flow meter as a turbine which is subject to the flow of circulating medium in the drill line, with a measured value transmitter in the form of a generator driven by the turbine, permits of particularly precise acquisition of variations in volumetric flow while at the same time the complication and costs are minimised since the turbine with the generator can at the same time be used as an underground voltage source to operate electrical and/or electronic consumer devices.

Further details and advantages of the invention will emerge from the ensuing description of an embodiment of the object of the invention which is shown in greater detail in the attached drawings, in which:

- Fig.1 is a diagrammatic overall view of a drilling plant with various partial zones;
 Fig.2 is a details view of a modified embodiment of the means of controlling the shut-off valve in the branch pipe;
 Fig.3 is a broken away partial section through the drilling tool in the region of the data receiver;
 Fig.4 illustrates the pulse-like pattern of a variation in volumetric flow according to the invention, during the transmission of signals;
 Fig.5 is a modified configuration of the pulse pattern, and
 Fig.6 is a diagram illustrating the winding voltage of the generator in relation to time.

Fig. 1 illustrates a drilling plant for drilling in underground formations with a drill tower 1 for constructing and driving a drill line 2 which has a swivel head 3 at its top end 3 and a drilling tool 4 at its bottom end. The drilling tool disposed in the bore hole 5 comprises a housing 6, stabilisers 7, 8 and a portion 9 with stabiliser ribs 10 which can be extended and retracted in a controlled fashion. The portion 9 is mounted on and is adapted to rotate about the tool spindle 11 and in relation to the housing 6 while in operation it is rotationally rigid in the bore hole 2 whereas the drilling tool 4, together with the drill head 12, for example a rotary drill bit or roller bit, can be caused to rotate by means of the drill line 1.

Furthermore, the drilling installation comprises an only diagrammatically shown drilling mud tank 13 in which there is a supply of circulating medium 14, one (or a plurality of parallel or series-connected) drilling mud pump(s) 15, of which the inlet connector(s) 15' extend(s) into the supply of circulating medium, a main pipe 16 which connects the drilling mud pump 15 to the swivel head 3, and a return pipe 17 which is connected to a header 18 at the top of the bore hole 5 and which discharges into the drilling mud tank 13. Through the return pipe 17, circulating medium is transferred to the drilling mud tank 13 from the annular space 19 between the wall of the bore hole and the drill line 2.

In operation, the drilling mud pump 15 delivers circulating medium 14 in a circuit in the direction of the arrow 20 from the drilling mud tank 13 downwards through the interior of the drill line 2 and drill head 12 and subsequently in the direction of the arrow 21 upwards through the annular space 19 between the drill line 2 and the bore hole wall and onwards to the drilling mud tank 13. The drilling mud pump 15 is driven by a diagrammatically shown drive motor 22 of constant output and accordingly delivers circulating medium 14 in a constant volumetric flow to the main pipe 16.

Connected to the main pipe 16 and discharging into the drilling mud tank 13 is a branch pipe 23 into which a shut-off valve 24 which can be actuated by hand or by any suitable drive means 25 is incorporated. The drive 25 can be controlled by an electronic control and monitoring device (not shown in Fig. 1), by means of which sequential changes in volumetric flow can be effected automatically, as will be dealt with hereinafter. By means of the shut-off valve 24, the branch pipe 23 can be completely isolated or made completely available for the through flow of a partial flow of circulating medium, the direction of flow of which is illustrated by the arrow 26. Downstream of the shut-off valve 24 there is a throttle 27 by which the maximum amount of volumetric flow change brought about by opening the branch pipe 23 can be predicted, which enters that part of the main pipe 16 which is situated after the branching point and therefore enters the circulating medium circuit.

In the case of the embodiment of shut-off valve 24' according to Fig. 2, the shut-off member 28 is actuated by a pressurised medium drive 29 subject to the action of a control valve 30 which applies a pressurised medium to it, for example compressed air from a pressurised medium storage means 31. The control valve is connected by pressurised medium lines 32, 33 to the pressurised medium store 31, there being incorporated into the pressurised medium line 33 a switching valve 34 controlled for example by an electronic control and monitoring unit 35 which preferably consists of or comprises an electronic computer. By means of the regulating valve 30, it is possible to regulate the speed at

which the shut-off member 28 opens and closes. At the same time, it is possible to move to intermediate positions between the opened and closed positions of the shut-off member 28.

The preferred variation in volumetric flow which is illustrated is carried out above ground but in principle, the variation can be made anywhere downstream of the pump(s) which is situated upstream of the underground sensor which detects the variation in volumetric flow.

In the case of the example of embodiment illustrated, there is in the housing 6 of the drilling tool 4 and subject to the action of the flow of circulating medium in the drill line 2, a turbine 36, the guide wheel 37 of which is rigidly connected to the housing 6 and the rotor 38 of which is supported by bearings 40, 41 on a central supporting member 39 fixed in the housing 6 by a stator carrying and centring part 39, so that the rotating blade ring 42 is able to rotate in the direction of the arrow 43. At the same time, the turbine rotor 38 forms the rotor housing of a generator which carries magnets 44 and encloses a winding package 45 mounted on the supporting member 39. The output voltage is applied via an electrical connecting line 46 to an electronic processing unit indicated diagrammatically at 47 and which is at the same time the data receiver and which may for example be part of an electronic device for controlling the directional drilling tool 4.

In order to carry out a process of data transmission in respect of data available at the surface to the underground data receiver 47, during uninterrupted drilling operations, the shut-off valve 24, 24' is actuated in such a way as to open the branch pipe 23 so that in the flow of circulating medium in the drill line 2 and also in the region of the turbine 36, there is a reduction in volumetric flow which results in a reduction in the rotary speed of the rotor 38 of the turbine 36. This variation in rotary speed which is proportional to the variation in volumetric flow is detected by the data receiver 47 as a signal which counts for example the number of passages through zero in relation to time of the winding voltage curve 48 shown in Fig. 6. In Fig. 6, the winding voltage is associated with the

ordinate 49 while the time is associated with the abscissa 50 of the co-ordinates; intersection and the time period 51 corresponds to one complete rotation of the turbine/generator rotor 38.

Closing the shut-off valve 24, 24' increases the volumetric flow of circulating medium 14 in the region of the turbine 36, with the result that the increase is understood by the data receiver 47 to be a further processable signal.

Instead of the preferred turbine/generator combination which in many applications is in any case required for supplying underground consumer devices, it is also possible to use any other suitable volumetric flow meter. Also, instead of a generator, it is possible to associate with the turbine any other rotary speed sensor, for example sensors which operate on the centrifugal force or punched disc principle.

According to the manner of actuation and the design of the shut-off valve, so a pulse-like pattern can be imposed on the variations in volumetric flow, as illustrated for example by the trace 52 in Fig. 4, illustrating the variation in volumetric flow in relation to time.

The pattern or steepness of the pulse flanks 53 depends thereby upon the way in and speed at which the shut-off member of the shut-off valves 24, 24' is actuated. In accordance with the variations in volumetric flow, so also the generator voltage changes, as can be seen from Fig. 5, in which by way of example the generator voltage is plotted in relation to time.

In order to vary the pulse pattern, the time span between commencement and completion of a partial flow branch-off, the proportion of branched-off partial flow in relation to the total flow of circulating medium delivered by the circulating mud pump 15 and/or the time-related pattern of commencement and/or completion of the branching-off of circulating medium can be varied. Preferably, the variations in volumetric flow are illustrated by signals coded as a digital sequence and which are adapted to trigger any

desired consequential actions.

Data transmission is independent of the type of data which is to be transmitted. It is possible to transmit both control signals for a directional drilling tool, signals for switching over operating modes of individual components of the underground system, depth data, stop-and-start signals to an underground transmitter, etc., so that the transmission of data in accordance with the invention can find universal application. If the control device is constructed as an electronic computer, it is also possible to perform automatic data exchange operations on the lines of an automatic reaction to the data received in the data content.

Patent claims

1. A method of transmitting data present at the surface to a data receiver disposed underground in a bore hole, in particular a receiver unit in a drilling implement, during drilling operations, and in which at least one surface-moulded drilling mud pump pumps a circulating medium around in a circuit from a drilling mud tank downwards through the interior of a drill line and a drill head and upwards in the annular space between drill line and bore hole wall and on to the drilling mud tank, the volumetric flow of circulating medium being altered in order to transmit data and the alteration being detected and evaluated by the data receiver, characterised in that the volumetric flow of circulating medium generated by the drilling mud pump is altered in a zone situated downstream of the said pump.
2. A method according to claim 1, characterised in that the volumetric flow is altered by branching a partial flow from the volumetric flow of circulating medium which is generated by the drilling mud pump.
3. A method according to claim 2, characterised in that the branched-off partial flow is fed back to the drilling mud tank.
4. A method according to one of claims 1 to 3, characterised in that the length of time between the start and finish of a partial flow being branched off is varied.
5. A method according to one of claims 1 to 4, characterised in that the branched-off partial flow is varied in its proportion of the total flow of circulating medium which is delivered by the drilling mud pump.
6. A method according to one of claims 1 to 5, characterised in that at the start and/or at the end of a branching-off process the proportion of the total flow of circulating medium which is represented by the branched-off partial flow is increased from zero to

maximum or is reduced from maximum to zero, in either case steplessly or in several stages.

7. An apparatus for transmitting data available on the surface to a data receiver (47), particularly a receiver unit in a drilling tool (3) disposed underground in a bore hole, during drilling operations, with a drilling mud tank (13), at least one drilling mud pump (15), a main pipe (16) connected to the drilling mud pump (15) and leading to the top end of the drill line (2) and a sensor associated with the data receiver and responding to variations in the volumetric flow in the drill line (2), characterised in that a branch pipe (23) controlled by a shut-off valve (24, 24') is connected to the main pipe (16), and a volumetric flow meter (36, 38, 44, 45) is provided as sensor.
8. An apparatus according to claim 7, characterised in that the volumetric flow meter provided is a turbine (36) disposed in the housing (6) of the drilling tool and subject to the flow of circulating medium in the drill line (2) and of which the rotor (38) is coupled to a measured value transmitter which detects the rotary speed of said rotor.
9. An apparatus according to claim 7, characterised in that the measured value transmitter provided is a generator (44, 45) driven by the rotor (38) of the turbine (36) and the output voltage of which is related to the volumetric flow.
10. An apparatus according to one of claims 7 to 9, characterised in that the shut-off member (28) of the shut-off valve (24, 24') in the branch pipe (23) can be actuated by a drive (25, 29) adapted to be controlled by an electronic control device.
11. An apparatus according to claim 10, characterised in that the drive provided is a pressurised medium drive (29) subject to the action of a pressurised medium exerted by a control valve (30).
12. An apparatus according to claim 11, characterised in that the control valve (30)

is connected to a compressed air source (31) and in that a switching valve (34) is adapted to be actuated by an electronic control device (35) is disposed in a connecting line (33).

13. An apparatus according to one of claims 10 to 12, characterised in that an electronic computer is provided as the control device.

14. An apparatus according to one of claims 7 to 13, characterised in that a throttle (27) is disposed in the branch pipe (23) downstream of the shut-off valve (24, 24').

15. An apparatus according to one of claims 7 to 14, characterised in that the branch pipe (23) discharges into the drilling mud tank (13).

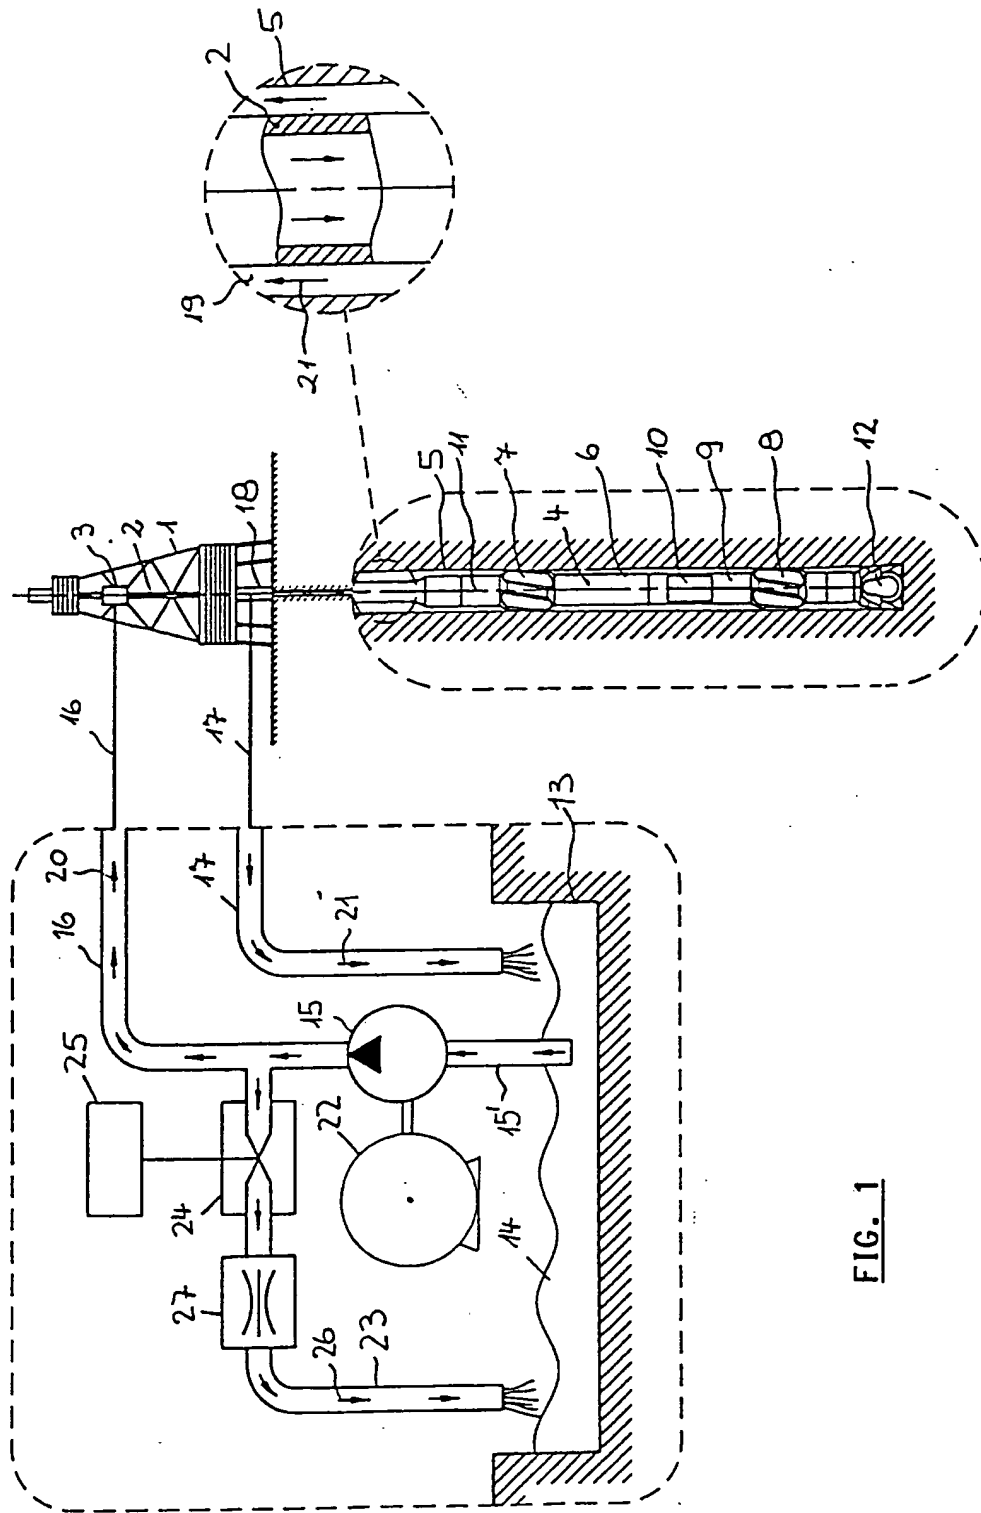
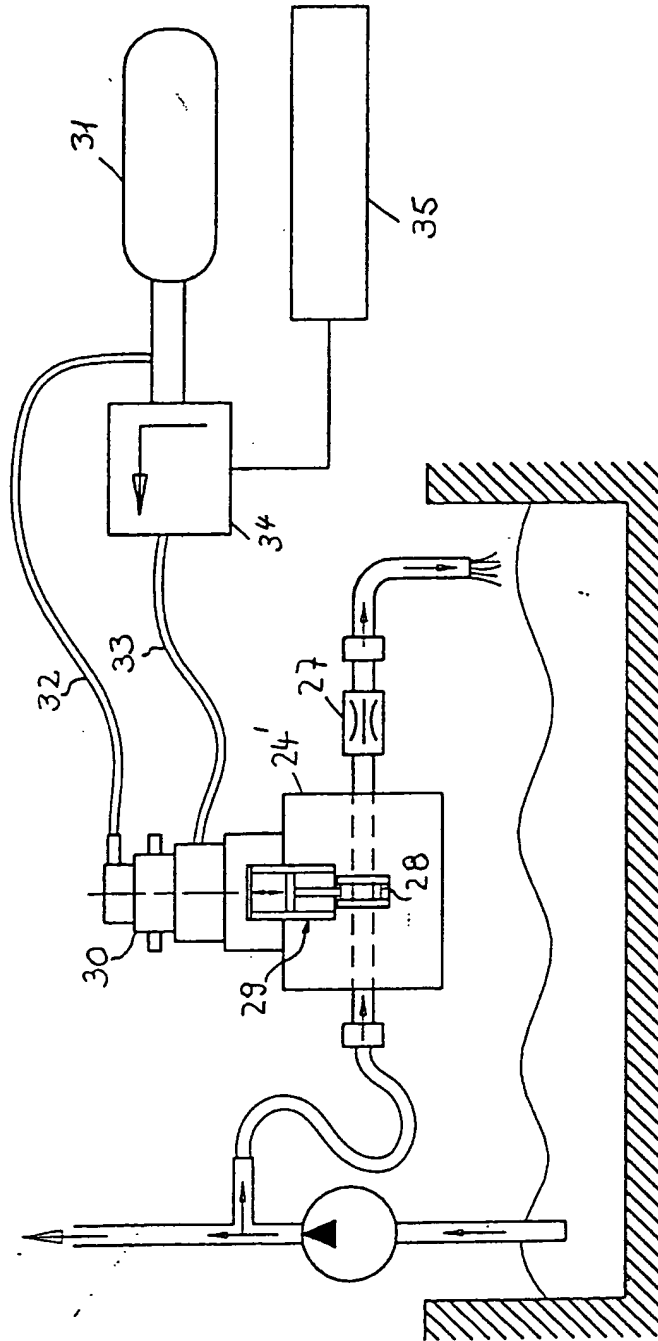


FIG. 1

FIG. 2

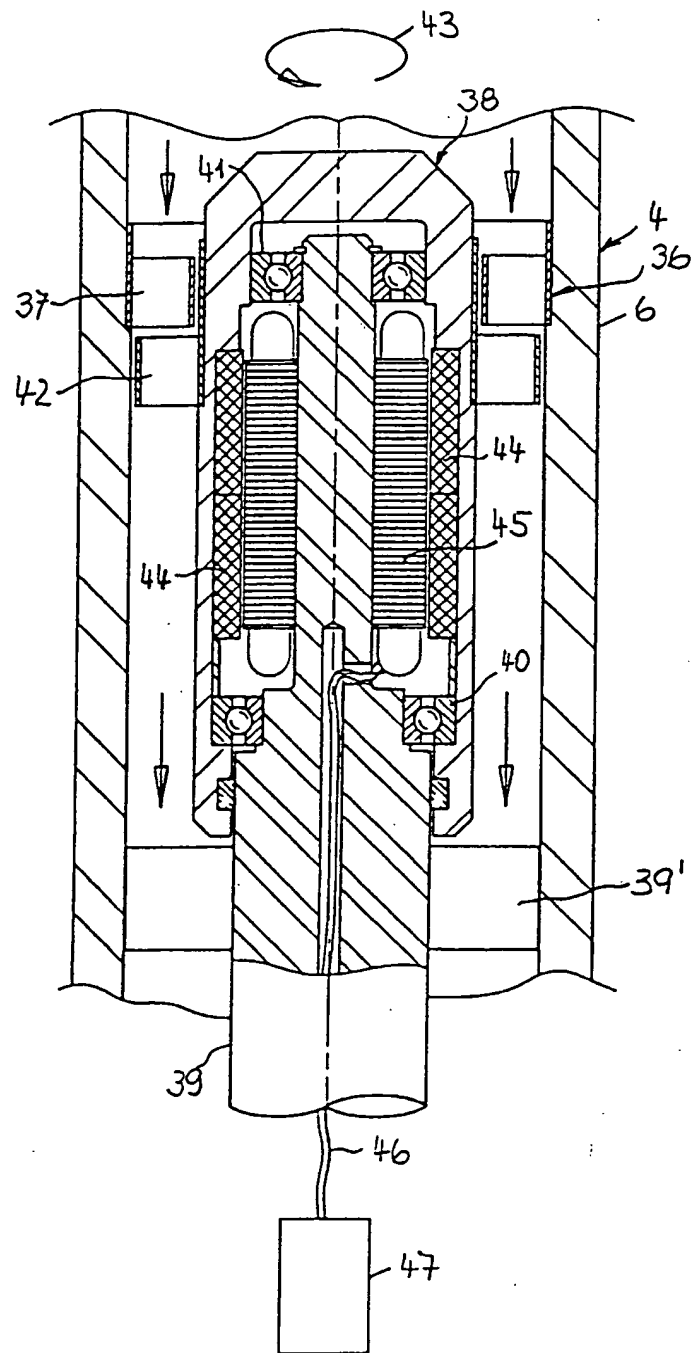


FIG. 3

FIG. 4

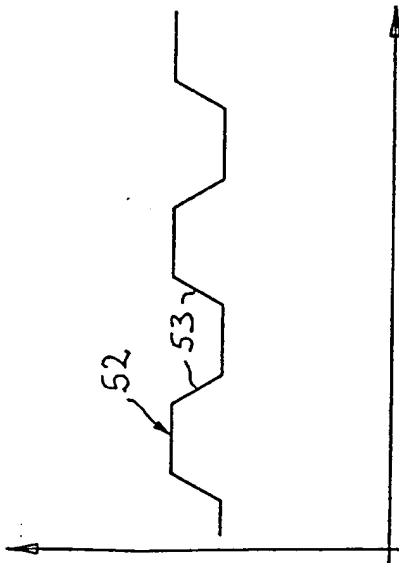


FIG. 5

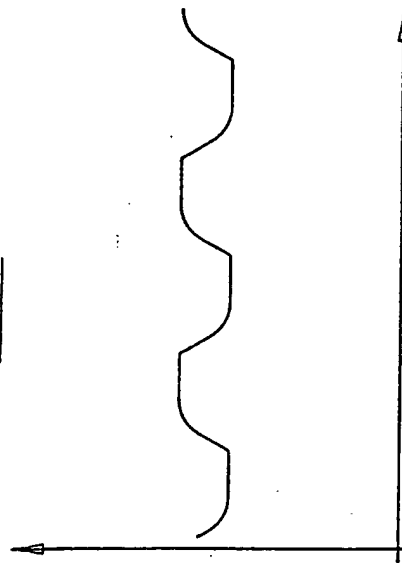


FIG. 6

